



N110 SERIES
Single Swing

Exterior Storefront Door System

Modern commercial entrance system for storefronts, office buildings, retail entrances, and high-traffic exterior access points.



ENGINEERED | PRECISE | RELIABLE

NIXADOORS.COM



DESIGNED FOR MODERN COMMERCIAL ENTRANCES.

The N110 Series is a prehung aluminum exterior storefront door system built for security, weather performance, and everyday commercial use. It combines clean architectural lines, laminated safety glass, reliable locking hardware, and smooth self-closing operation.




NIXADOORS.COM



N110 SERIES | SINGLE SWING

2

DETAILS THAT WORK EVERY DAY

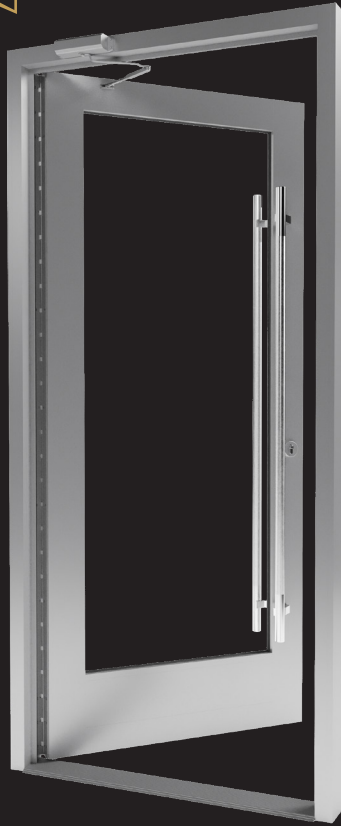

The N110 Series is an exterior storefront door system built for clean design, secure access, weather protection, and daily commercial use.

BUILT FOR



Storefront Entrances



Office Buildings




Retail Buildings



High-Traffic Commercial Access Points



Medical & Professional Buildings



Reinforced Aluminum Frame

2.1 mm aluminum frame with 3.2 mm internal brackets supports durable commercial use.



60 in. Architectural Pull Handle

Long vertical pull handle adds a clean, modern commercial look.




High-Security Locking System

Commercial-grade locking system supports dependable access control.




Advanced Sealing

998-grade silicone sealant helps create a durable weather-resistant bond.




Hidden Fastener Frame

Concealed channels create a clean finish with reduced visible hardware.




ADA Low-Profile Threshold

1/2 in. low-profile threshold supports smoother, more accessible entry.




Integrated Self-Closing System

Adjustable commercial closer supports smooth, controlled closing.



10 in. Kick Plate Protection

Heavy-duty kick plate helps protect against scuffs, carts, and foot traffic.



Laminated Safety Glass

1.3 mm PVB laminated glass improves safety, sound control, and impact resistance.



Continuous Hinge System


Full-height hinge helps maintain alignment and reduce sag.

N110 SERIES Single Swing

CONFIGURATIONS & TECHNICAL OVERVIEW



SWING OPTIONS

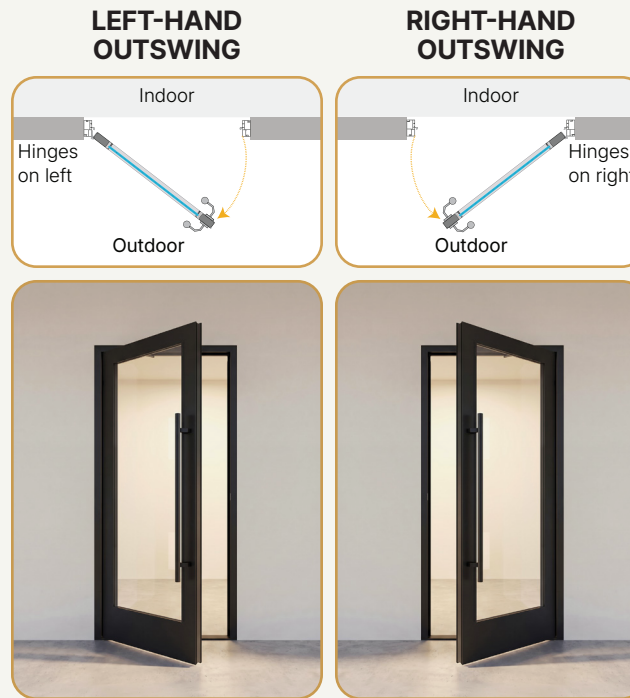

FINISH OPTIONS



TECHNICAL SPECIFICATIONS

Series	N110 Series Single Swing
Door Size	36 in. × 84 in.
Frame Size	40 1/2 in. × 87 in.
Door Thickness	1.8 in.
Lock Type	Commercial-grade high-security locking system
Closing System	Adjustable commercial door self-closer
Glass	1.3 mm PVB laminated safety glass
Frame Material	2.1 mm aluminum with 3.2 mm internal brackets
Handle	60 in. architectural pull handle
Threshold	1/2 in. low-profile threshold
Hinges	Continuous hinge
Kick Plate	10 in. heavy-duty kick plate
Sealant	998-grade silicone sealant

BUILT FOR COMMERCIAL SPACES

Designed for storefronts, offices, retail buildings, professional spaces, and modern exterior commercial entrances.

